Buyer Protection | Help | Save big on our app! | Ship to / USD | Language

I'm shopping for...

0



Mini 4Inch 1080P High Speed PTZ 2MP IP Camera Outdoor Waterproof IP66 18X Optical Zoom IR 80m Support Mobile P2P View

Price: **US $235.26** / piece

Sensor Size: 1/3"

Seller Guarantees: ships out within 3 business days
On-time Delivery 23 days

This is a snapshot of the product taken when the order was placed. **View current product**

CCTVPRO
China (Mainland)

Visit Store

Add to My Favorite Stores

Product Details

Item specifics

Technology:Pan / Tilt / Zoom
Sensor:CMOS
Connectivity:IP/Network Wired
Type:IP Camera
Style:Dome Camera
Lens (mm):4.7- 84.6mm,18x optical zoom,day vision 500m
Special Features:Waterproof / Weatherproof IP66
IR distance:6pcs IR LED, Max. IR distance 80m
Support :PC HCMS Client OR Standard Browser IE/Firefox/Google Chrome view
Power suply:12V,2A DC
Resolution:2mp 1920*1080

Brand Name:BOAVISION
Special Features:Waterproof / Weatherproof
Supported Operating Systems:Windows 7
High Definition:1080P(Full-HD)
Model Number:IPCX-57S-UB-I-2MP
Sensor:1/3"Prongressive Scan CMOS
Lens:4.7- 84.6mm,18x optical zoom,day vision 500m
Support P2P Mobile Phone APP:Iotp2pcam
High speed:max pan 200°/s and max tilt 30°/s
Housing Material:plastic

Product Description

Mini 4Inch 1080P High Speed PTZ 2MP IP Camera Outdoor Waterproof IP66 18X Optical Zoom IR 80m Support Mobile P2P View




2.0MP
1920*1080
DAY AND NIGHT MODE
6PCS LED
IR DISTANCE
80M
WATERPROOF
WEATHERPROOF
ONVIF
P2P CLOUD



ANALOG LINE NUMBER COMPARISON CHART

HD IP CAMERA ALLOWS YOU TO RECORD MORE DETAILS COVER MORE SPACE WITHOUT LOSING ANY DETAIL



[CAN BE USED IN THOSE PLACES]



ARANA



WAREHOUSE

Store No.821744



OFFICE



HOTEL



SCHOOL



BUSINESS STORE



VILLA



ROOM



GARAGE

Item Features

1 HIGH-END CAMERA IMAGING LENS



2 SUPER MINI APPEARANCE

Actual size products and iphone6 contrast



3 THE NIGHT VISION FUNCTION

6pcs leds ,IR distance80m



Item Picture




RS485






QC
PASS

Item Details



PRODUCTS WILL EFFECT

CLEAR, DELICATE AND BRIGHT COLOURS TRUE DURING THE DAY
(THE ACTUAL SHOOTING DISTANCE IS 500 M)







HIGH-PERFORMANCE IP CAMERA

HOUSING MATERIAL:PLASTIC,VANDAL-PROOF,WATERPROOF **18X OPTICAL ZOOM**



CLEAR NIGHT SHOOTING-NO LIGHT AT NIGHT
(THE ACTUAL SHOOTING DISTANCE IS 200 M)



Method of use



No matter you in any place, as long as there is the WiFi can be directly connected to the phone
Every camera has a unique qr code


Store No:321744

iPhone
android








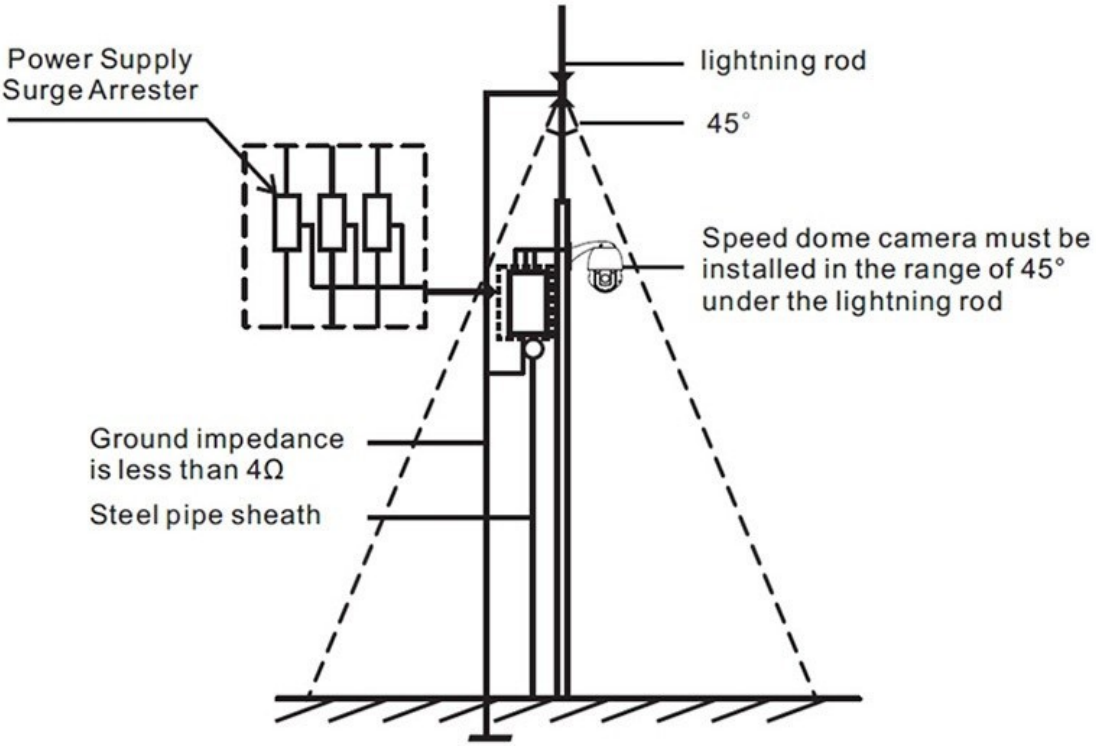

WAN Connection

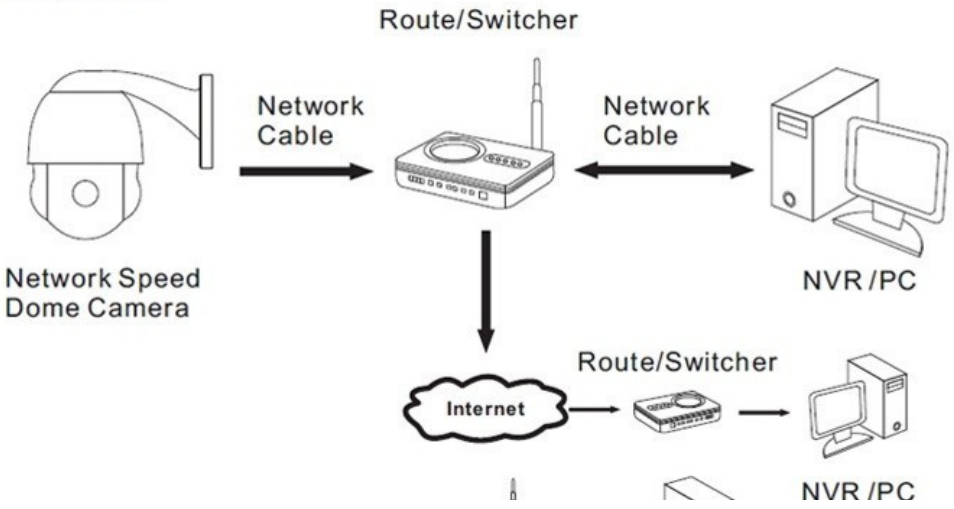


Store No:321744


Store No:321744


Store No:321744


Store No:321744


Store No:321744


Store No:321744


Screw Hole
Screw Hole
QC
PASS
Store No:1221744

Mobile phone support

Three steps to complete the installation

Ten seconds to complete mobile client Settings, three steps to complete the installation

First connect the camera equipment is installed, the mobile phone monitoring software download good, then as shown in figure under operation

Store No:321744


1. Open the installed ISO/android: (APP: IOTP2PCAM)




2. According to the APP to fill in information




3. Click on Add Camera connection

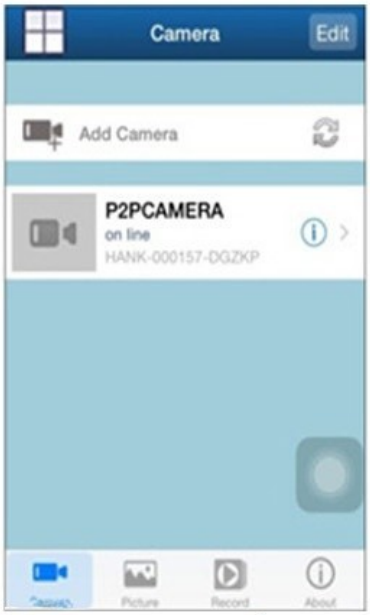

4. Input corresponding host information, and add to save point

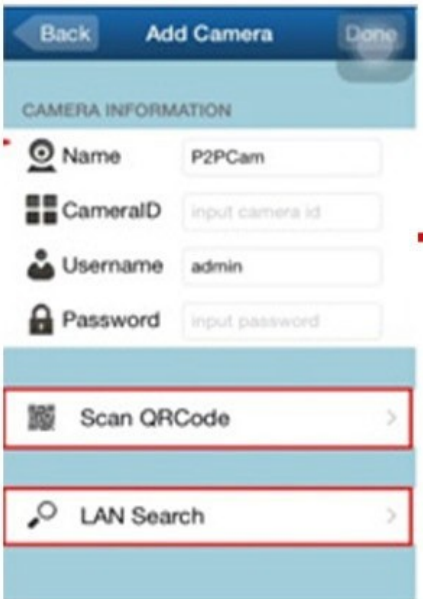

5. The connection is successful

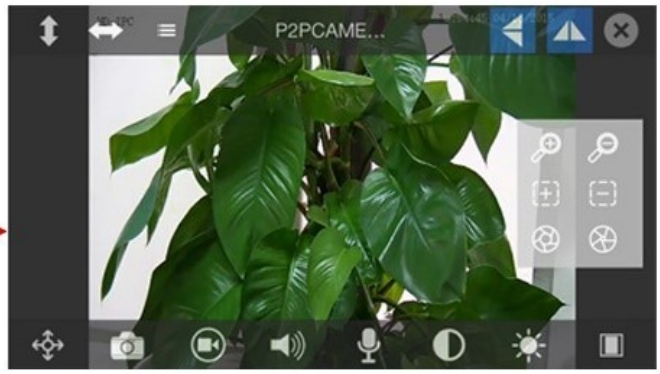

Iphone Android

ITEM DESCRIPTION

Product Introduction

1) Precision motor-driven, responsive, smoothly operation, the precision deviation less than 0.1 degree.
2) 2.0MegaPixels, 1/3" CMOS, 18X optical zoom, support ONVIF protocol.
3) Support TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, UPnP Protocols.
4) Support lightning protection, anti-surge, anti-surge function.
5) Outside weather-proof level up to IP66
6) Support mobile phone Android, iPhone OS view app:iotp2pcam
7) Support PC HCMS Client OR Standard Browser IE/Firefox/Google Chrome view

Features

1)6 PCS high-power infrared lights, no flashlight effect , IR distance 40-80 m.
2)360°endless pan range and 0°- 90°tilt range, support auto-flip, non-surveillance blind area
3)Max. pan preset speed of 200°/s and max. tilt preset speed of 30°/s
4)Pan keyboard speed 0.6°~180°/s, tilt keyboard speed 3.5°~30°/s.
5)Support 220 preset, support 8 patrols, each patrol can contain up to 32 presets;
6)Support 4 patterns, can totally record up to 10 minus.
7)Support scan between two presets, area limited.
8)Support Proportional zoom function, rotation speed can be adjusted automatically according to zoom multiples
9)Support park action, presets/pattern/patrol/pan scan can invoke automatically after a defined time of inactivity (contain the idling condition after the power supply has been turn on)

Parameters :

Model Number		IPCX-57S-UB-I-2MP(wall mounted)
Camera	Image Sensor:	1/3" CMOS
	Effective Pixels:	2.0MP pixels
	Min. Illumination:	Color: 0.2Lux@(F1.6, AGC ON), B/W: 0.01Lux@(F1.6, AGC ON)
	White Balance:	Auto
	AGC:	Auto/Manual
	S/N Ratio:	>50dB
	Day & Night:	IR Cut Filter
	Backlight Compensation:	support
	Digital Noise Reduction:	3D DNR
	Wide Dynamic Range:	support
	Shutter Speed:	1/10s-1//10,000s
Lens	Focus Mode:	Auto/Manual/ONEAF
	Focal Length:	4.7- 84.6mm,18 X optical zoom,day vision 500m
	Zoom Speed:	Approx.3s(Optical Wide-Tele)
	Angle of View:	68.5 ~ 4.2 degree (Wide-Tele)
	Min. Working Distance:	10mm ~ 1,000mm (Wide-Tele)
	Aperture Range:	F1.6 ~ F 2.8
Pan/Tilt	Pan / Tilt Range:	Pan: 360° endless; Tilt: -0° ~ 90° (Auto-Flip)
	Pan / Tilt Speed:	Pan Speed: 0.6° ~ 200° /s,Tilt Speed: 3.5° ~ 30° /s
	Proportional Zoom:	support
	Number of Preset:	220
	Patrol:	8 patrols, up to 32 presets per patrol
	Park Action:	Pattern / Pan Scan / Tilt scan / Random scan / Frame scan
Network	Ethernet:	10Base-T/100Base-TX, RJ45 connector
	Max. Image Resolution:	1920x1080
	Frame Rate:	60HZ:30fps(1920x1080) 60HZ:30fps(1280x1080)
	Image Compression:	H.264/MJPEG
	Protocols:	IPv4/IPv6, HTTP, HTTPS, 802.1x, Qos, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTP, TCP/IP, UDP, IGMP, ICMP, DHCP, PPPoE
	Simultaneous Live View:	Up to 6
	Streams:	Dual Streams
	User/Host Level:	Up to 32 users,3 Levels: Administrator, Camera control, Live view only

Integration	Security Measures:	User authentication (ID and PW) Host authentication (MAC address)
	Application programming:	Open-ended API, support Onvif, PSIA and CGI
	Web Browser:	IE 7, IE 8, IE 9, Chrome 8+, Firefox 3.5+, Safari 5+
	IR distance:	40m-80m
	RS-485 Protocols:	Pelco-P, Pelco-D, self-adaptive
	Working Temperature:	12VDC: -20°C~60°C
	Humidity:	90% or less
	Protection Level:	TVS3000V lightning protection, surge protection and voltage transient protection, weather proof: IP66
General	Package Dimension:	265*250*210mm
	Weight (approx.):	2.28Kg
	Camera Weight:	1.47kg
	Mount Option:	Wall mount,
	Power:	DC12V/2A

Packing list:

1 x 4 inch mini ptz 1080P Camera
1 x User manual
1 x CD
1 x Screws
1 x Power adapter

Packaging Details

Unit Type:piece
Package Weight:2.5kg
Package Size:27cm x 26cm x 22cm

Help

Customer Service, Disputes & Reports, Making Payment, Delivery Options, Buyer Protection, New User Guide

AliExpress Multi-Language Sites

Russian, Portuguese, Spanish, French, German, Italian, Dutch, Turkish, Japanese, Korean, Thai, Vietnamese, Arabic, Hebrew, Polish

Browse by Category

All Popular, Product, Promotion, Low Price, Great Value, Retail, Reviews, China Brands

Alibaba Group

Alibaba Group Website, AliExpress, Alimama, Alipay, AliTravel, AliCloud, Alibaba International, Ali Telecom, Ding Talk, Juhuasuan, LaiWang, Net.cn, Taobao Markertplace, Tmall, Xiami, YUN OS, 1688

Google Play **App Store**

© 2010-2016 AliExpress.com. All rights reserved.